


# DIFUSOR CIRCULAR CON REGISTRO

## Características:

- Difusor aluminio pintado BLANCO o ANODIZADO PLATA
- Registro de plástico negro
- Puente de montaje

Código (Blanco-Anodizado)	Ø	ØA	D	H
RX01131-RX01136	150	257	149	225
RX01132-RX01137	200	307	199	275
RX01133-RX01138	250	357	249	325
RX01134-RX01139	300	407	299	375
RX01135-RX01140	350	457	349	425

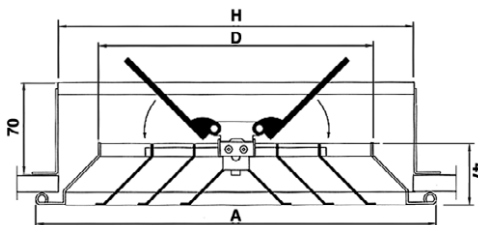

## Accesorios: Cuello de montaje flexible

Modelo m <sup>3</sup> /h		6"	8"	10"	12"	14"
100	Vel	2.75	1.20	0.77	0.54	0.40
	P	0.70	0.28	0.23	0.21	0.20
	Tmín	0.50	0.33	0.27	0.22	0.19
	Tmáx	0.92	0.70	0.61	0.55	0.51
	dbA	<15	<15	<15	<15	<15
150	Vel	4.12	1.79	1.16	0.81	0.60
	P	1.33	0.40	0.28	0.23	0.21
	Tmín	0.75	0.49	0.40	0.33	0.29
	Tmáx	1.25	0.92	0.79	0.70	0.64
	dbA	<15	<15	<15	<15	<15
200	Vel	5.50	2.39	1.55	1.08	0.81
	P	2.22	0.57	0.35	0.27	0.23
	Tmín	1.00	0.66	0.53	0.44	0.38
	Tmáx	1.59	1.13	0.96	0.85	0.77
	dbA	<15	<15	<15	<15	<15
250	Vel	6.87	2.99	1.94	1.35	1.01
	P	3.37	0.79	0.44	0.31	0.26
	Tmín	1.24	0.82	0.66	0.55	0.48
	Tmáx	1.92	1.35	1.14	0.99	0.89
	dbA	32	18	<15	<15	<15
300	Vel	8.25	3.59	2.32	1.61	1.21
	P	4.77	1.05	0.55	0.36	0.29
	Tmín	1.49	0.99	0.79	0.66	0.57
	Tmáx	2.25	1.57	1.32	1.14	1.02
	dbA	37	24	<15	<15	<15
350	Vel	9.62	4.18	2.71	1.88	1.41
	P	6.42	1.37	0.68	0.43	0.32
	Tmín	1.74	1.15	0.93	0.77	0.67
	Tmáx	2.58	1.79	1.49	1.29	1.15
	dbA	41	28	18	<15	<15
400	Vel	10.99	4.78	3.10	2.15	1.61
	P	8.33	1.73	0.83	0.50	0.36
	Tmín	1.99	1.31	1.06	0.88	0.76
	Tmáx	2.91	2.01	1.67	1.43	1.28
	dbA	45	32	21	<15	<15

Modelo m <sup>3</sup> /h		6"	8"	10"	12"	14"
450	Vel	12.37	5.38	3.49	2.42	1.81
	P	10.50	2.14	1.01	0.58	0.41
	Tmín	2.24	1.48	1.19	0.99	0.86
	Tmáx	3.24	2.23	1.84	1.58	1.40
	dbA	48	35	25	16	<15
500	Vel		5.98	3.87	2.69	2.02
	P		2.60	1.20	0.67	0.46
	Tmín		1.64	1.32	1.10	0.95
	Tmáx		2.45	2.02	1.73	1.53
	dbA		38	28	19	<15
600	Vel		7.17	4.65	3.23	2.42
	P		3.66	1.64	0.89	0.58
	Tmín		1.97	1.59	1.32	1.14
	Tmáx		2.88	2.37	2.02	1.78
	dbA		43	33	24	17
700	Vel		8.37	5.42	3.37	2.82
	P		4.91	2.17	1.14	0.72
	Tmín		2.30	1.85	1.54	1.33
	Tmáx		3.32	2.72	2.31	2.04
	dbA		47	37	29	21
800	Vel			6.20	4.31	3.22
	P			2.78	1.44	0.89
	Tmín			2.11	1.76	1.52
	Tmáx			3.08	2.61	2.29
	dbA			41	32	25
900	Vel			6.97	4.84	3.67
	P			3.47	1.77	1.07
	Tmín			2.38	1.98	1.72
	Tmáx			3.43	2.90	2.55
	dbA			44	36	29
1.000	Vel			7.75	5.38	4.03
	P			4.23	2.14	1.28
	Tmín			2.64	2.20	1.91
	Tmáx			3.78	3.19	2.80
	dbA			8.52	39	32

Vel = velocidad, m/s  
 P = presión, mm  
 Tmín = alcance mínimo

Tmáx = alcance máximo  
 dbA = nivel sonoro, dbA